


# Acer U5200 DLP Projector

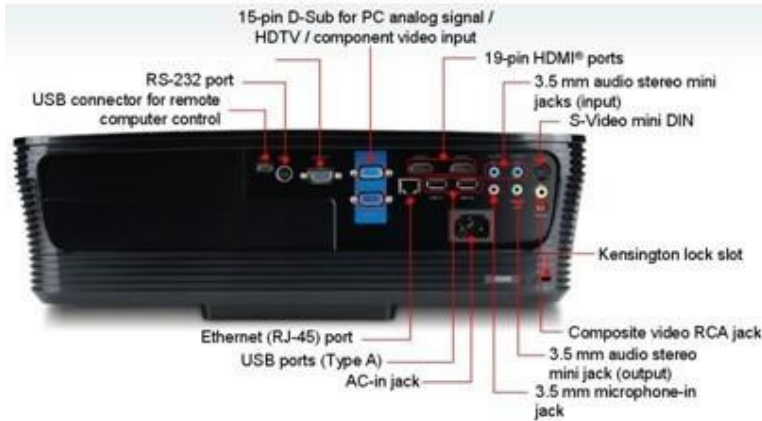

- Advanced digital connectivity to full HD devices
- Networked management tools for remote monitoring, control and reporting systems.
- At just 13cm (from rear side of projector to the wall), up to 77" image is displayed resulting in virtually no shadows when user is writing on the interactive board.
- DLP 3D ready

The new Acer projector U5200 was created to help the education system by implementing the new classroom teaching and learning.

Display Panel	0.55" DarkChip™ 3 DMD
Resolution	Native XGA (1,024 x 768) Maximum UXGA (1,600 x 1,200), 1080p (1,920 x 1,080)
Computer Compatibility	IBM PC and Compatibles, Apple iMac/MacBook, and VESA Standards 1080p (1,920x1,080), WSXGA+ (1,680 x 1,050), WXGA+ (1,440 x 900), WXGA (1,280 x 800, 1,280 x 768), UXGA (1,600 x 1,200), SXGA+ (1,400 x 1,050), SXGA (1,280 x 1,024), XGA (1,024 x 768), SVGA (800 x 600), VGA (640 x 480)
Video Compatibility	NTSC (3.58/4.43), PAL (B/D/G/H/I/M/N), SECAM (B/D/G/K/K1/L), HDTV (720p, 1080i, 1080p), EDTV (480p, 576p), SDTV (480i, 576i)
Aspect Ratio	4:3 (Native), 16:9
Contrast Ratio	4200:1
Displayable Colors	1.07 Billion Colors
Brightness	2,500 ANSI Lumens (Standard), 2,000 ANSI Lumens (ECO)

Projection Lens	F = 2.65, f = 3.50mm, Manual Focus
Projection Size	60" (152cm) ~ 300" (762cm) Diagonal
Projection Distance	1.0" (2.4cm) ~ 59" (149cm)
Throw Ratio	77"@13cm (0.30:1)
Horizontal Scan	30k ~ 100k Hz
Vertical Refresh	50 ~ 120 Hz
Lamp Type	Replaceable UHP lamp
Lamp Life	3,500 Hours (Standard), 5,000 Hours (ECO)
Keystone Correction	+/-10 Degrees (Vertical ), Manual
Projection Mode	Front, Rear, Front-Ceiling, Rear-Ceiling
Ceiling Mountable	Yes
Audio	<b>20 watts speaker</b> (Two internal speaker with 10 watts output)
Weight	15.4 lbs (7.0Kg)
Dimensions	422 x 345 x 140 mm (16.6" x 13.6" x 5.5")
Remote Control	IR remote control with laser pointer & PgUp/PgDn functions
Digital Zoom	2X
Wireless Capability	Optional (By separate USB wireless adapter)
Power Supply	AC input 100~240V auto-switching power supply
Power	380 Watts (Operation), <1 Watts (Standby, LAN off)
Noise Level	33 dBA (Standard mode), 27 dBA (ECO mode)
Input Interface	Analog RGB/Component Video (D-sub) x 2 , Composite Video (RCA) x 1 , S-Video (Mini DIN) x 1 , HDMI (Video, HDCP) x 2 , PC Audio (Stereo mini jack) x 2, USB (Type A) x 2, USB (Mini-B) x 1
	Mic In (Stereo mini jack) x 1

Output Interface	Analog RGB (D-sub) x 1 , PC Audio (Stereo mini jack) x 1
Control Interface	USB (Mini-B) x 1, shared with the one of Input Interface, RS232 (Mini DIN) x 1, 12V DC (Screen control) x 1
Network Interface	Ethernet port (RJ45) x 1
Standard Accessories	AC power cord, VGA cable, Composite video cable, remote control, 2x battery for remote, carrying case, users guide, quick start guide, security card